

## Declaration of Performance (DOP)

No. 9174 039 DOP 2013-06-17

1. Unique identification code of the product-type:

**Multi-wall chimney system with ceramic flue liner type DW-MAMMUT according to EN 13063-1**

2. Type, batch or serial number or any other element allowing identification of the construction product as required under Article 11(4):

**Three-wall chimney system type DW-MAMMUT with ceramic flue liner  
and 32 mm heat insulation<sup>1)</sup>**

**Model 1          DN (120- 200) T400 – N1 – D – 3 – G50**

<sup>1)</sup> Manufacturer product identification DW-MAMMUT

3. Intended use or uses of the construction product, in accordance with the applicable harmonised technical specification, as foreseen by the manufacturer:

**Multi-wall chimney system for dry operation  
for the evacuation of exhaust gases from heating appliances to the outside**

4. Name, registered trade name or registered trade mark and contact address of the manufacturer as required under Article 11(5):

**Jeremias GmbH**  
Opfenrieder Straße 11-14  
DE-91717 Wassertrüdingen  
Tel.: +49 9832 68 68 0  
Fax: +49 9832 68 68 68  
Email: [info@jeremias.de](mailto:info@jeremias.de)

5. Where applicable, name and contact address of the authorised representative whose mandate covers the tasks specified in Article 12(2):

**not applicable**

6. System or systems of assessment and verification of constancy of performance of the construction product as set out in CPR, Annex V:

**System 2+ and System 4**

7. In case of the declaration of performance concerning a construction product for which a European Technical Assessment has been issued:

**Notified factory production control certification body no. 0036 performed the initial inspection of the manufacturing plant and of factory production control and the continuous surveillance, assessment and evaluation of factory production control and issued the certificate of conformity 0036 CPD 9174 039 of the factory production control.**


8. Declared performance:

	Essential Characteristics	Performance	Harmonized technical specification
8.1	Compressive strength  Chimney sections, fittings and supports	<u>Sections and fittings:</u> Model 1 DN (120- 200): <b>up to 30 m</b> <u>Supports:</u> n.p.d. For further information see the installation instruction DW-MAMMUT.	EN 13063-1
8.2	Installation type	Three-wall chimney system for installation on facades or in buildings acc. the national fire safety regulations (L90) (for example installation in duct).	EN 13063-1
8.3	Gas tightness/leakage	Model 1 DN (120- 200): <b>N1</b>	EN 13063-1
8.4	Flow resistance of chimney sections  Fittings and terminals	Model 1 DN (120- 200): <b>1,5 mm</b> Zeta-value according to DIN EN 13384-1  see certification	EN 13063-1
8.5	Thermal resistance	Model 1 DN (120- 200): <b>0,322 m²K/W</b>	EN 13063-1
8.6	Thermal shock resistance  Sootfire resistance	Model 1 DN (120- 200): <b>Yes</b> <sup>2)</sup> <sup>2)</sup> Because designated G	EN 13063-1
8.7	Thermal performance under normal operating conditions	Model 1 DN (120- 200): <b>T400</b>	
8.8	Non vertical installation	Model 1 DN (120- 200): Maximum offset between supports: (inclined run: maximum offset with elbows 30°)	EN 13063-1
8.9	Components subject to wind load	Model 1 DN (120- 200): Free standing height <b>3 m</b> above last support. Maximum spacing between lateral supports at vertical installation: <b>4 m</b>	EN 13063-1
8.10	Dangerous substances	Model 1 DN (120- 200): <b>No</b>	EN 13063-1
8.11	Manufacture	Acid compound NISOTT 2010 or other compounds from the manufacturer Osmose, Staudt.	EN 13063-1
8.12	Durability:  Abrasion resistance	Model 1 DN (120- 200): <b>≤0,03 kg/m²</b>	EN 13063-1
8.13	Compared with acid/ corrosion resistance	Model 1 DN (120- 200): <b>≤ 2%</b>	
8.14	Freeze thaw resistance	Model 1 DN (120- 200): <b>Yes</b>	
8.15	Application	Use of chimney systems in vertical construction for domestic fireplaces with gaseous (1), fluid (2) or solids (3) fuels.	EN 13063-1

9. The performance of the product identified in points 1 and 2 is in conformity with the declared performance in point 8. This declaration of performance is issued under the sole responsibility of the manufacturer identified in point 4.

Signed for and on behalf of the manufacturer by:

Wassertrüdingen, 17<sup>th</sup> June 2013



.....  
Stefan Engelhardt CEO

## Product information

“Chimneys - System chimneys with clay/ceramic flue liners - Part 1:  
Requirements and test methods for sootfire resistance”  
EN 13063-1:2005+A1:2007

Manufacturer’s identification:

**jeremias GmbH**  
**Opfenrieder Str. 11-14**  
**91717 Wassertrüdingen**  
Tel.: +49 (0) 9832 / 68 68-50  
Fax: +49 (0) 9832 / 68 68-68  
Internet: [www.jeremias.de](http://www.jeremias.de)  
E-Mail: [info@jeremias.de](mailto:info@jeremias.de)

Product trade name:

**dw-Mammut**

Certification office:

TÜV Industrie Service GmbH TÜV SÜD Gruppe

Name and position of the responsible person:

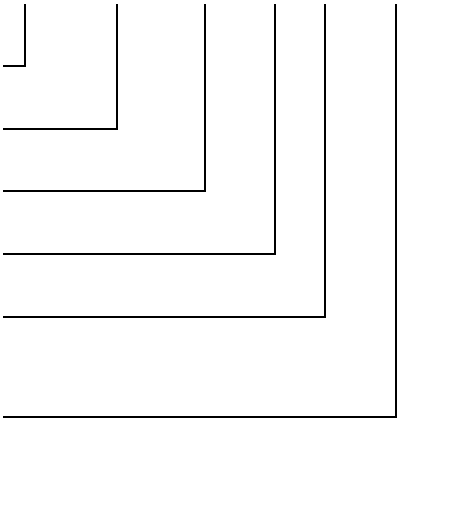
**Stefan Engelhardt** CEO



Identification of accompanying documentation

dw-Mammut      **System**      **EN**      **T400 N1 D 3 G50**  
**chimney**      **13063-1**

Three wall chimney system, sootfire resistant, flue inner liner of ceramic, 32 mm heat insulation, outer wall of SS. Ventilated throughout the whole length, without covering. Locking band necessary. Operation mode in negative pressure.

Product description	
Standard number	
Temperature level	
Pressure level	
Condensate resistance (W: wet or D: dry)	
Corrosion resistance (durability against corrosion)	
Sootfire resistant (G: yes / O: no)	
Distance to combustible material (in mm)	

### EN 13063- Part 1

Requirements for multi-wall system chimneys with ceramic liners

**Compressive strength:**

Maximum load ≤ 30 m, see installing instructions

**Flow resistance:**

Average roughness: 1.5 mm, Zeta values acc. EN 13384-1

**Thermal resistance in stack:** ≥ 0.322 m<sup>2</sup>K/W

**Wind load: free standing end above last fixation:** 3 m

**Maximum distance between vertical supports:** 4 m

**Freeze-thaw resistance:** Yes